


DB4 print & apply



- Variable information, including use-by-date, batch number and quantity, can be easily added at time of print in both barcode and text formats making the DB4 ideal for both food and industrial labelling.
- The DB4's unique digital control unit with LCD provides push-button control of the label position on the pack and includes a labels-applied counter
- Supplied complete with optical product detector and robust support stand the DB4 can operate in conjunction with existing conveyors or can be supplied complete with conveyor and product handling systems.
- The DB4 can be supplied ready to upgrade to RFID or already fully equipped for RFID labelling.

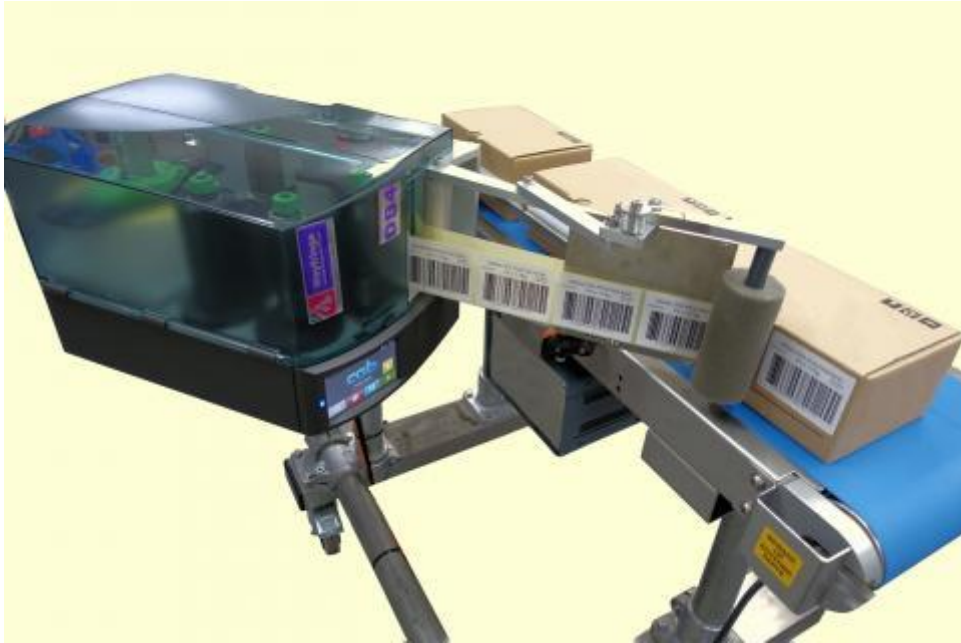

Technical Specifications	
Label apply speed	Max. 45 labels.min
Label width	Max. 116mm
Label length	Max. 200mm
Print resolution	203-300 dpi
Print type	Direct/Thermal transfer
Apply orientation	Top, bottom, side, front, wraparound
Apply tolerance	+/- 3mm
Label roll diameter	Max. 203mm
Ribbon length Max.	450m
Interfaces	RS232, USB, Ethernet, Wireless (option)
Conveyor speed	Max. 12m/min